



**CHENMKO ENTERPRISE CO.,LTD**

**SURFACE MOUNT**

SCHOTTKY BARRIER DIODE

VOLTAGE 30 Volts CURRENT 1.0 Ampere

Halogens free devices

**CH511H-30GP**

**APPLICATION**

- \* Low power rectification

**FEATURE**

- \* Small surface mounting type. (SC-76/SOD-323)
- \* Ultra low VF. (VF=0.47V Typ. at 1.0A)
- \* High reliability


**CONSTRUCTION**

- \* Silicon epitaxial planar



**MARKING**

- \* L

**CIRCUIT**



**SC-76/SOD-323**

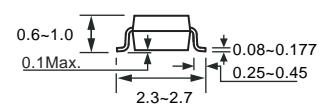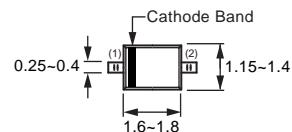

Dimensions in millimeters

**SC-76/SOD-323**

**MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )**

RATINGS	SYMBOL	CH511H-30GP	UNITS
Maximum Recurrent Peak Reverse Voltage	VR <sub>RM</sub>	30	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	21	Volts
Maximum DC Blocking Voltage	V <sub>D</sub> C	20	Volts
Maximum Average Forward Rectified Current	I <sub>O</sub>	1.0	Amps
Peak Forward Surge Current at 8.3 mSec single half sine-wave	I <sub>FSM</sub>	2.0	Amps
Typical Junction Capacitance between Terminal (Note 1)	C <sub>J</sub>	15	pF
Maximum Operating Temperature Range	T <sub>J</sub>	+125	°C
Storage Temperature Range	T <sub>STG</sub>	-40 to +125	°C

**ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )**

CHARACTERISTICS	SYMBOL	CH511H-30GP	UNITS
Maximum Instantaneous Forward Voltage at I <sub>F</sub> (1)= 100mA	V <sub>F</sub> (1)	0.36	Volts
Maximum Instantaneous Forward Voltage at I <sub>F</sub> (2)= 1000mA	V <sub>F</sub> (2)	0.47	Volts
Maximum Average Reverse Current at V <sub>R</sub> = 20V	I <sub>R</sub>	100	uAmps

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 10.0 volts.  
2. ESD sensitive product handling required.

2001-6

## RATING CHARACTERISTIC CURVES ( CH511H-30GP )

FIG. 1 - FORWARD CHARACTERISTICS

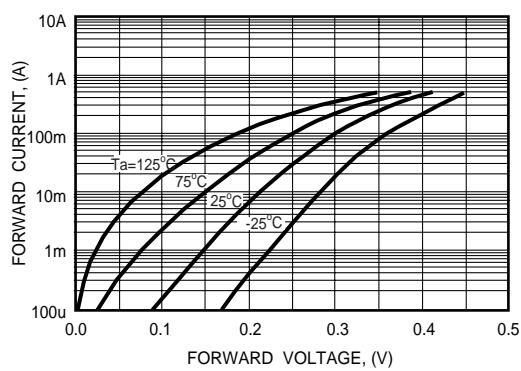


FIG. 2 - REVERSE CHARACTERISTICS

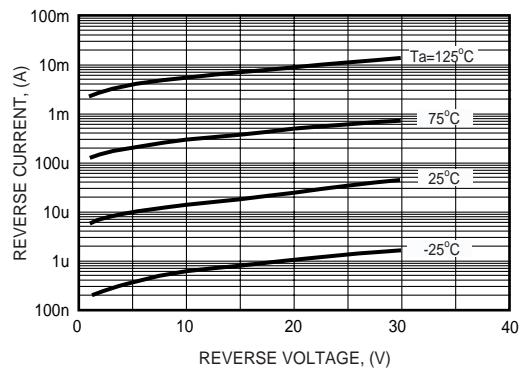


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

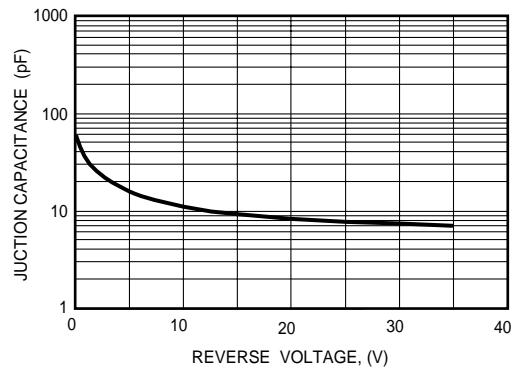


FIG. 4 - TYPICAL FORWARD CURRENT DERATING CURVE

