CHENMKO ENTERPRISE CO.,LTD

CHT4401SGP

Halogens free devices

SURFACE MOUNT
NPN Switching Transistor

VOLTAGE 40 Volts CURRENT 0.6 Ampere

APPLICATION

* Telephony and proferssional communction equipment.
* Other switching applications.

FEATURE

* Small surface mounting type. (SC-88/SOT-363)
* Low current (Max.=600mA).
* Suitable for high packing density.
* Low voltage (Max.=40V) .
* High saturation current capability.
* Voltage controlled small signal switch.

CONSTRUCTION

* NPN Switching Transistor

MARKING

* DS

CIRCUIT



SC-88/SOT-363



Dimensions in millimeters

SC-88/SOT-363

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	60	V
V_{CEO}	collector-emitter voltage	open base	–	40	V
V_{EBO}	emitter-base voltage	open collector	–	6	V
I_C	collector current DC		–	600	mA
P_{tot}	total power dissipation	$T_{amb} \leq 25$ °C; note1	–	200	mW
T_{stg}	storage temperature		–55	+150	°C
T_j	junction temperature		–	150	°C
T_{amb}	operating ambient temperature		–55	+150	°C

Note

2004-11

1. Transistor mounted on an FR4 printed-circuit board.

RATING CHARACTERISTIC CURVES (CHT4401SGP)

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j\text{-}a}$	thermal resistance from junction to ambient	note 1	200	°C/W

Note

1. Transistor mounted on an FR4 printed-circuit board.

CHARACTERISTICS

T_{amb} = 25 °C unless otherwise speciÞed.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{CBO}	collector cut-off current	$I_E = 0$; $V_{CB} = 60$ V	–	50	nA
I_{EBO}	emitter cut-off current	$I_C = 0$; $V_{EB} = 6$ V	–	50	nA
h_{FE}	DC current gain	$V_{CE} = 1$ V; note 1 $I_C = 0.1$ mA $I_C = 1$ mA $I_C = 10$ mA $I_C = 1\ 50$ mA $V_{CE} = 2$ V;note 2 $I_C = 500$ mA	 20 40 80 100 40	 – – – 300 –	
V_{CEsat}	collector-emitter saturation voltage	$I_C = 150$ mA; $I_B = 1\ 5$ mA	–	400	mV
		$I_C = 500$ mA; $I_B = 5\ 0$ mA	–	750	mV
V_{BEsat}	base-emitter saturation voltage	$I_C = 150$ mA; $I_B = 15$ mA	750	950	mV
		$I_C = 500$ mA; $I_B = 5\ 0$ mA	–	1200	mV
C_c	collector capacitance	$I_E = i_e = 0$; $V_{CB} = 5$ V; f = 1 4 0 K Hz	–	6.5	pF
C_e	emitter capacitance	$I_C = i_c = 0$; $V_{BE} = 500$ mV; f = 140KHz	–	30	pF
f_T	transition frequency	$I_C = 20$ mA; $V_{CE} = 10$ V; f = 100 MHz	250	–	MHz
Switching times (between 10% and 90% levels);					
t_{on}	turn-on time	$I_{Con} = 150$ mA; $I_{Bon} = 15$ mA; $I_{Boff} = -1\ 5$ mA	–	35	ns
t_d	delay time		–	15	ns
t_r	rise time		–	20	ns
t_{off}	turn-off time		–	250	ns
t_s	storage time		–	200	ns
t_f	fall time		–	60	ns

Note

1. Pulse test: $t_p \leq 300$ µs; $\delta \leq 0.02$.

RATING CHARACTERISTIC CURVES (CHT4401SGP)

Typical Characteristics

Typical Pulsed Current Gain vs Collector Current

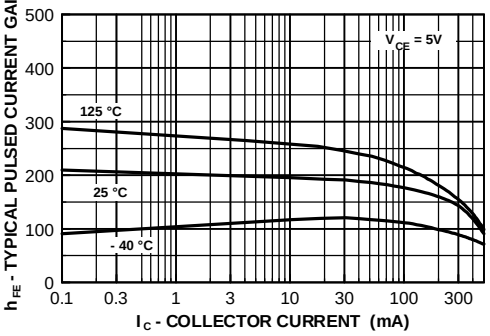

Collector-Emitter Saturation Voltage vs Collector Current

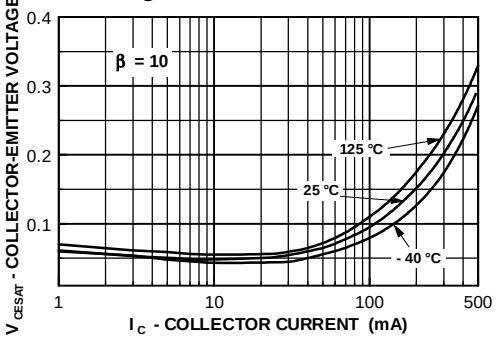

Base-Emitter Saturation Voltage vs Collector Current

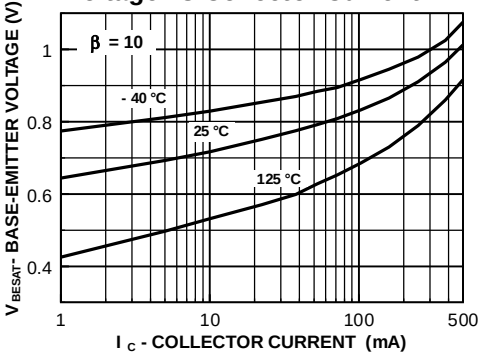

Base-Emitter ON Voltage vs Collector Current

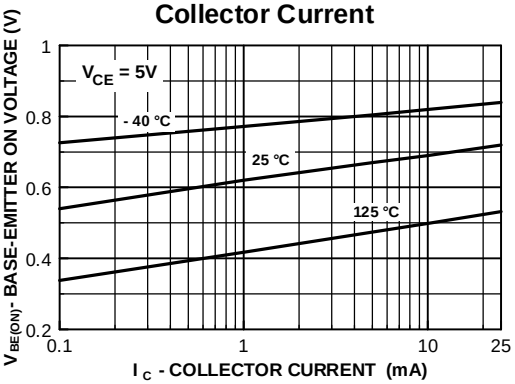

Collector-Cutoff Current vs Ambient Temperature

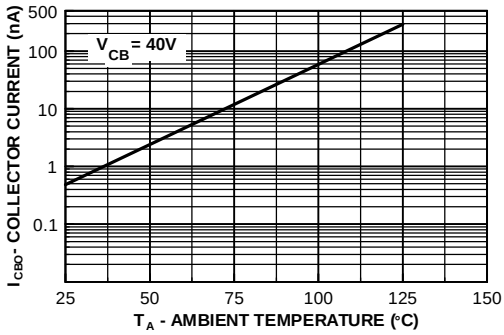

Emitter Transition and Output Capacitance vs Reverse Bias Voltage

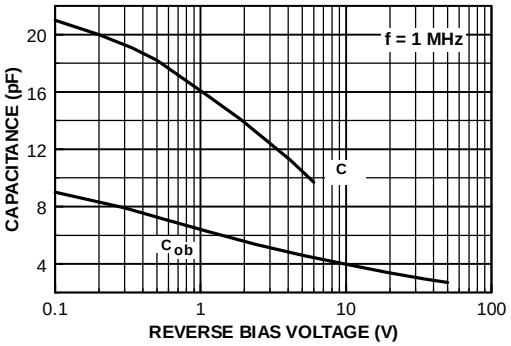

RATING CHARACTERISTIC CURVES (CHT4401SGP)

Turn On and Turn Off Times vs Collector Current

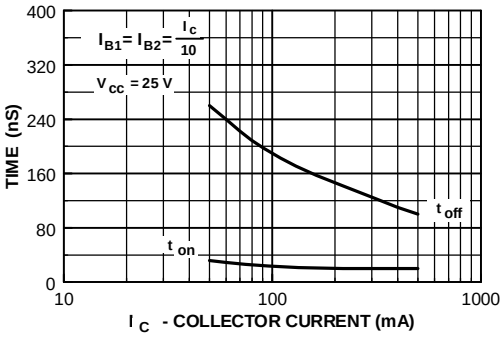

Switching Times vs Collector Current

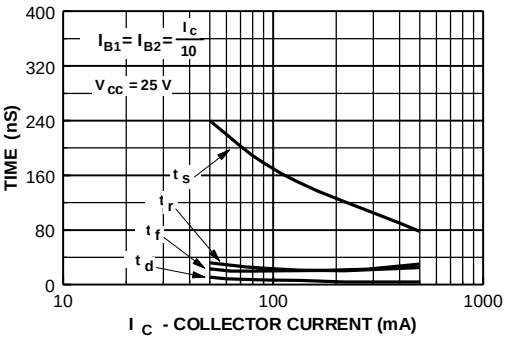
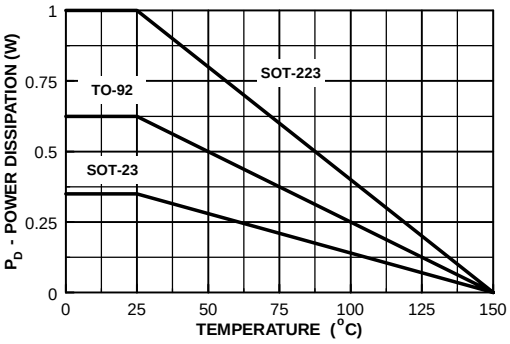
Power Dissipation vs Ambient Temperature