



CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

SURFACE MOUNT ZENER
SILICON PLANAR POWER ZENER DIODES
VOLTAGE RANGE 33 V

CHAZ4752BGP-A

FEATURE

* High temperature soldering type.

MECHANICAL

* SMA Packaging.
* Cathode indicated by polarity band.


MARKING

* 4752

CIRCUIT



SMA

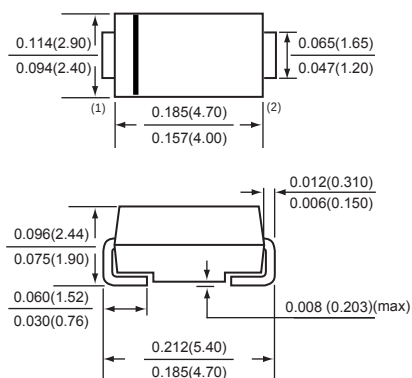

Dimensions in inches and (millimeters)

SMA

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	VALUE	UNITS
Zener Current (see Table "Characteristics")	-	-	-
Max. Steady State Power Dissipation @TA=25°C	PD	1.0	W
Max. Operating Temperature Range	TJ	-65 to +150	°C
Storage Temperature Range	TSTG	-65 to +150	°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

TYPE	Zener voltage Vz (V) @ IZT			Test current IZT (mA)	Maximum Zener impedance			Maximum reverse leakage current	
	Min	Nom	Max		ZZT at IZT (Ω)	ZZK (Ω)	at Izk (mA)	IR (uA)	at VR (V)
	Volts	Volts	Volts						
CHAZ4752BGP-A	31.35	33	34.65	7.5	45	1000	0.25	5	25.1

2015-03

RATING CHARACTERISTIC CURVES (CHAZ4752BGP-A)

FIG. 1 - TYPICAL TEMPERATURE COEFFICIENTS)

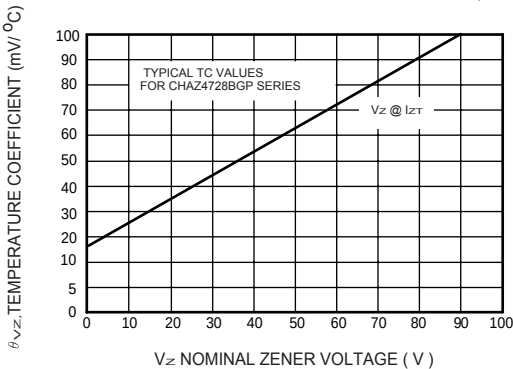


FIG. 2 - TYPICAL LEAKAGE CURRENT

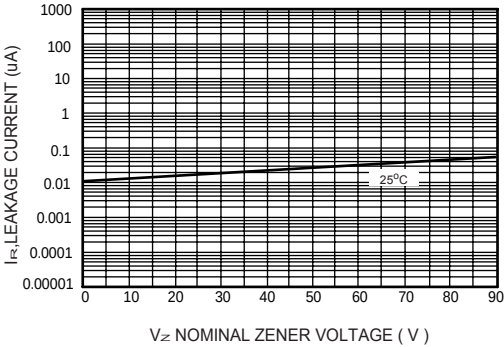


FIG. 3 - ZENER VOLTAGE VERSUS ZENER CURRENT

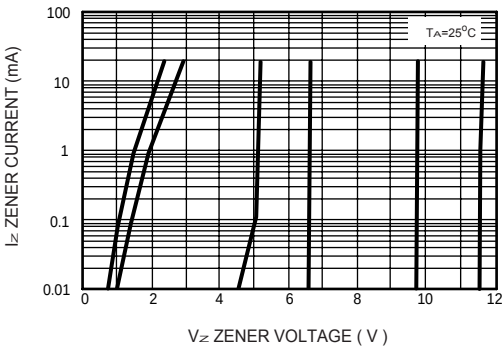


FIG. 4 - ZENER VOLTAGE VERSUS ZENER CURRENT


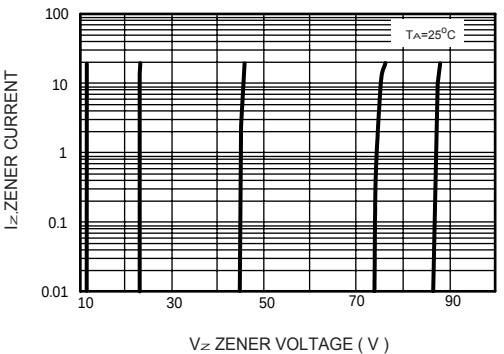


FIG. 5 - TYPICAL POWER DISSIPATION DERATING CURVE



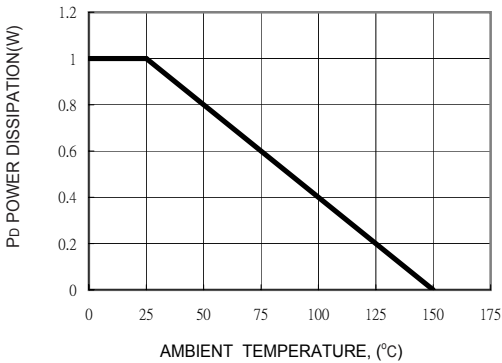

CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

RECOMMENDED FOOT PRINT

all dimensions in mm

SMA

SMA

